

Thank you for purchasing the new microphone. This unit has been carefully engineered and manufactured to rigid quality standards, and should give you satisfactory and dependable operation for many years.

1. BEFORE OPERATION

IMPORTANT:
Please read this Instruction Manual carefully before placing your microphone in service.

- 1. Handle the microphone with reasonable care. Do not subject to excessive mechanical shock.
- 2. The microphone is constructed of precision parts. Do not open the microphone, as it may result in serious damage.

2. SPECIFICATIONS AND ACCESSORY

2-1. SPECIFICATIONS

SPECIFICATIONS	MODEL	KMC-9
Type		Uni-directional Dynamic Microphone (Preamplifier built-in)
Output Impedance		600Ω ± 30% (at 1 kHz)
Sensitivity		-50 dB ± 3 dB (at 1 kHz, 0 dB=1V/μ bar)
Frequency Characteristic		300 ~ 3000 Hz (± 6 dB)
Power Requirements		13.8 VDC (supplied from the radio)
Dimensions (W × H × D)		70 × 162 × 150 mm (2-3/4 × 6-3/8 × 5-29/32 inch)
Weight		550 g (1.2 lbs)

Note:
Ratings are subject to change without notice due to advancements in technology.

After unpacking
Shipping container:
Save the boxes and packing in the event your unit needs to be transported for maintenance or service.

2-2. ACCESSORY
Instruction Manual (B50-8179-08) 1 ea.

3. INSTALLATION AND CONNECTION


3-1. INSTALLATION

Cautions:
1. Do not place the unit in a place which is exposed to direct sunlight, near a heater, etc.
2. Do not store or use the unit in a dusty location or in a moist atmosphere. Select a well ventilated location.

3-2. CONNECTION


Plug the microphone modular connector into the radio's microphone connector so that the locking pin is positioned down. The microphone connector will lock in. To release, pinch the connector and locking pin together and pull them out.

4. OPERATION
4-1. CONTROLS


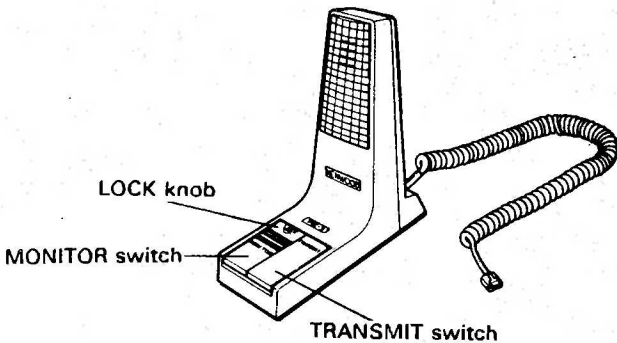


4-2. TRANSMIT
Notes:
1. The TRANSMIT switch cannot operate unless the MONITOR switch is on.
2. Before transmitting, press the MONITOR switch to check for a busy channel.

The MONITOR switch can be locked by sliding the LOCK knob toward you. To release, slide the LOCK knob in the opposite direction.
Operate the TRANSMIT switch by pressing the MONITOR and TRANSMIT switches simultaneously (fig. a), or press TRANSMIT switch after locking the MONITOR switch (fig. b).

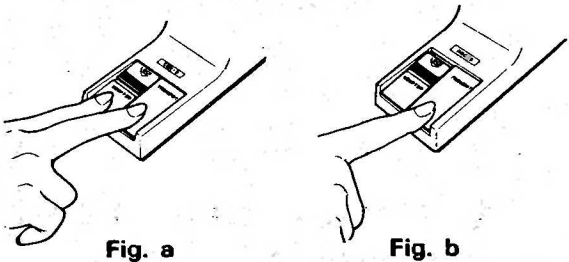

5. CIRCUIT DIAGRAM

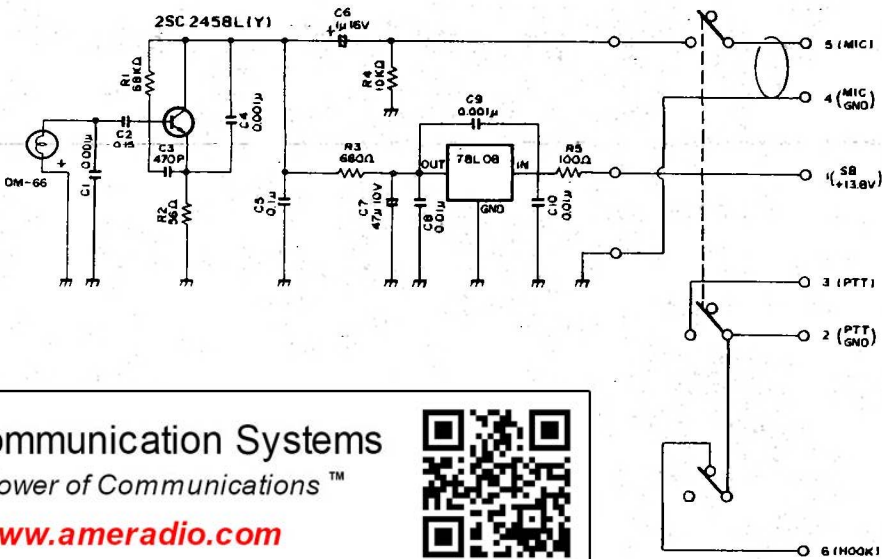

American Communication Systems
Discover the Power of Communications™
<http://www.ameradio.com>

Note:
Circuit diagram is subject to change without notice due to advancements in technology.

6. MAINTENANCE

Cleaning
The cabinet and the switches are likely to become soiled after extended use. These should be cleaned with a silicone cloth or a clean dry cloth.
Caution:
Do not use volatile solvents such as alcohol, paint thinner, gasoline, benzine, etc.

ИНСТРУКЦИЯ ПОЛЬЗОВАТЕЛЯ**СПАСИБО**

Благодарим Вас за приобретение микрофона фирмы KENWOOD. Данное изделие произведено из высококачественных материалов с использованием последних технических достижений.

ВНИМАНИЕ:

- Не роняйте микрофон; сильный удар может повредить электронные компоненты микрофона.
- Не разбирайте микрофон.
- Не оставляйте микрофон надолго под воздействием прямого солнечного света, не размещайте вблизи нагревательных приборов.
- Не устанавливайте микрофон в грязных или влажных местах, на неустойчивые поверхности.
- Не прилагайте чрезмерных нагрузок к кабелю микрофона, растягивая его с усилием.

РАСПАКОВКА И ПРОВЕРКА

Аккуратно распакуйте микрофон, убедитесь в отсутствии дефектов. При всех обнаруженных неисправностях немедленно обратитесь к дилеру.

ПОДКЛЮЧЕНИЕ

Перед подключением не забудьте выключить питание радиостанции.

§ КМС-9/ КМС-9С

1 Подключите разъём микрофона к микрофонному гнезду радиостанции.

- Убедитесь, что микрофон надёжно подключен к радиостанции.

2 Для отключения микрофона надавите на защёлку на разъёме микрофона и потяните на себя.

§ КМС-9В

Для подключения микрофона базовой радиостанции КМС-9В к радиостанции обратитесь к инструкции пользователя соответствующей радиостанции.

РАБОТА

Замечание: Клавиша "Передача" не работает, если не нажата клавиша "Monitor".


1 Нажмите клавишу "Monitor" и убедитесь, что канал свободен.

- Если канал занят, дождитесь окончания переговоров других радиоабонентов.

2 Удерживая нажатой клавишу "Monitor", нажмите клавишу "Передача" (Transmit).

- Радиостанция включится на передачу.
- Чтобы не держать клавишу "Monitor" всё время нажатой, сместите кнопку "Lock" на себя для фиксации клавиши "Monitor" в нажатом положении.

3 Говорите в микрофон не повышая голоса.

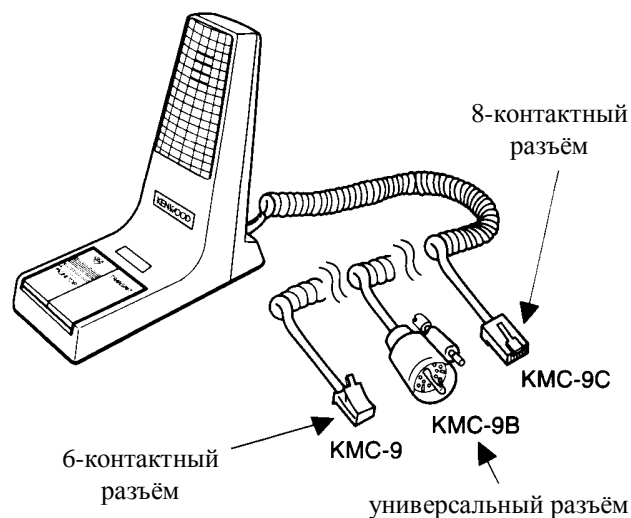**ЧИСТКА МИКРОФОНА**

Для чистки микрофона запрещается использовать спирт, бензин и другие подобные растворители и активные вещества. Используйте чистые влажные салфетки, смоченные в воде или слабом мыльном растворе. Опасайтесь попадания воды внутрь микрофона.

